

ELM6375DX

Drainable Adjustable Louver
Extruded Aluminum



APPLICATION

The ELM6375DX is a 6" deep extruded aluminum, operable louver with drainable blades and frame. With blades open, this louver is designed with a drainable gutter system channeling water from the blades to downspouts in the jambs, where water is exhausted out of the front of the louver. The operable function allows the louver to be operated closed when the occupant requires a tight air shut off to protect air intake and exhaust openings in building exterior walls.

STANDARD CONSTRUCTION


Frame	6" (152) deep, 6063T6 extruded aluminum with .081" (2.1) nominal wall thickness. Downspouts and caulking surfaces provided.
Blades	6063T6 extruded aluminum, .094" (2.4) nominal wall thickness. Drainable blades are adjustable to a 37 1/2° angle and blade spacing is approximately 6" (152) center to center.
Screen	5/8" x .040" (16 x 1) expanded, flattened aluminum bird screen in removable frame. Screen adds approximately 1/2" (13) to louver depth.
Seals	Flexible, compressible aluminum jamb seals. Santoprene push on blade seals.
Bearings	Stainless steel sleeve pressed into frame.
Axles	1/2" (13) plated steel hex.
Finish	Mill.
Linkage	Concealed in frame.
Actuator	Locking louver quadrant.
Minimum Size	12"w x 12"h (305 x 305).
Approximate Shipping Weight	3.5 lbs./ft. ² (17.1 kg/m ²).
Maximum Factory Assembly Size	Shall be 60" x 96" (1524x2438) without seals. Louvers with standard jamb seals and/or optional blade seals shall be 48" x 96" (1219 x 2438). Standard construction includes jamb seals. Louvers larger than the maximum factory assembly size will require field assembly of smaller sections.

FEATURES

- ▶ 56% Free Area.
- ▶ Published performance ratings based on testing in accordance with AMCA Publication 511.
- ▶ Low torque operation and architecturally pleasing appearance with low leakage performance.
- ▶ Drain gutter in the head frame and each blade; downspouts in jambs and mullions to drain water from louver.
- ▶ Concealed blade linkage is protected from weather exposure and reduces required installation depth.
- ▶ Jamb seals provide tight blade-to-frame closure.
- ▶ Beginning point of water penetration at .01 oz/sq ft is 1157 FPM in open position.

Note:

- Dimensions in inches, parenthesis () indicate millimeters.
- Units furnished 1/4" (6) smaller than given opening dimensions.

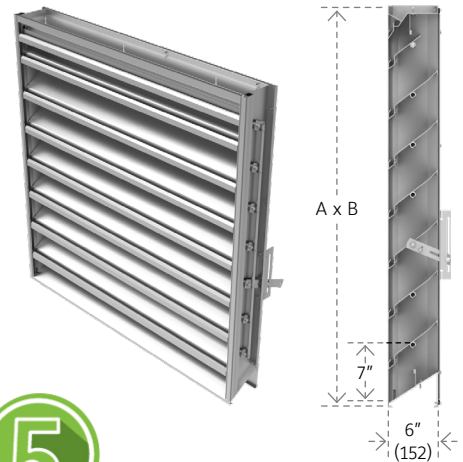

YEAR LIMITED
WARRANTY

ISO9001
CERTIFIED


VARIATIONS

Variations to the basic design of this louver are available at additional cost. They include:

- ▶ Extended sill.
- ▶ Front or rear security bars.
- ▶ Filter racks.
- ▶ Blade edge seals (optional).
- ▶ Jamb seals (optional).
- ▶ A variety of bird and insect screens.
- ▶ Jackshafts may be required with certain size and actuator configurations.
- ▶ Manual, electric or pneumatic actuators.
- ▶ Please provide rough opening dimensions for "A" and "B" dimensions. Unless ordered as actual size, the louver will be provided 1/2" (12) smaller than "A" and "B" dimensions provided.
- ▶ Selection of finishes: prime coat, 50% PVDF (modified fluoropolymer), epoxy, Pearledize, 70% PVDF, clear and color anodize. (Some variation in anodize color consistency is possible).

Consult Ruskin for other special requirements.

FRAME CONSTRUCTION

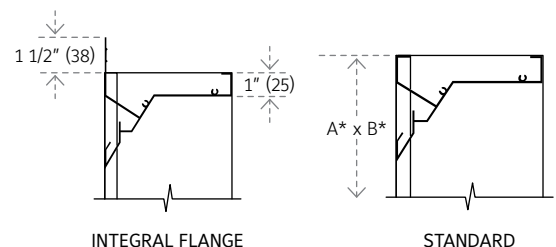

FREE AREA GUIDE


Free Area Guide shows free area in ft² and m² for various sizes of ELM6375DX.

Width – Inches and Meters

	HEIGHT	12	18	24	30	36	42	48	54	60	66	72	78	84	90	96	102	108	114	120
		0.30	0.45	0.60	0.75	0.90	1.05	1.20	1.35	1.50	1.65	1.80	1.95	2.10	2.25	2.40	2.55	2.70	2.85	3.00
Height – Inches and Meters	12	0.13	0.21	0.29	0.36	0.44	0.52	0.60	0.68	0.75	0.83	0.91	0.99	1.07	1.14	1.22	1.30	1.38	1.46	1.53
	0.30	0.01	0.02	0.03	0.03	0.04	0.05	0.06	0.06	0.07	0.08	0.08	0.09	0.10	0.11	0.11	0.12	0.13	0.14	0.14
	18	0.43	0.69	0.95	1.21	1.47	1.72	1.98	2.24	2.50	2.76	3.02	3.28	3.53	3.79	4.05	4.31	4.57	4.83	5.09
	0.45	0.04	0.06	0.09	0.11	0.14	0.16	0.18	0.21	0.23	0.26	0.28	0.30	0.33	0.35	0.38	0.40	0.42	0.45	0.47
	24	0.73	1.17	1.61	2.05	2.49	2.93	3.37	3.81	4.25	4.69	5.12	5.56	6.00	6.44	6.88	7.32	7.76	8.20	8.64
	0.60	0.07	0.11	0.15	0.19	0.23	0.27	0.31	0.35	0.39	0.44	0.48	0.52	0.56	0.60	0.64	0.68	0.72	0.76	0.80
	30	1.03	1.65	2.27	2.89	3.51	4.13	4.75	5.37	5.99	6.61	7.23	7.85	8.47	9.09	9.71	10.33	10.95	11.57	12.19
	0.75	0.10	0.21	0.21	0.27	0.33	0.38	0.44	0.50	0.56	0.61	0.67	0.73	0.79	0.85	0.90	0.96	1.02	1.08	1.13
	36	1.33	2.13	2.94	3.74	4.54	5.34	6.14	6.94	7.74	8.54	9.34	10.14	10.94	11.74	12.54	13.34	14.14	14.94	15.74
	0.90	0.12	0.20	0.27	0.35	0.42	0.50	0.57	0.65	0.72	0.79	0.87	0.94	1.02	1.09	1.17	1.24	1.32	1.39	1.46
	42	1.64	2.62	3.60	4.58	5.56	6.54	7.52	8.50	9.48	10.47	11.45	12.43	13.41	14.39	15.37	16.35	17.33	18.31	19.30
	1.05	0.15	0.24	0.33	0.43	0.52	0.61	0.70	0.79	0.88	0.97	1.06	1.16	1.25	1.34	1.43	1.52	1.61	1.70	1.79
	48	1.94	3.10	4.26	5.42	6.58	7.74	8.91	10.07	11.23	12.39	13.55	14.72	15.88	17.04	18.20	19.36	20.52	21.69	22.85
	1.20	0.18	0.29	0.40	0.50	0.61	0.72	0.83	0.94	1.04	1.15	1.26	1.37	1.48	1.58	1.69	1.80	1.91	2.02	2.12
	54	2.24	3.58	4.92	6.26	7.61	8.95	10.29	11.63	12.98	14.32	15.66	17.00	18.35	19.69	21.03	22.37	23.72	25.06	26.40
	1.35	0.21	0.33	0.46	0.58	0.71	0.83	0.96	1.08	1.21	1.33	1.46	1.58	1.71	1.83	1.96	2.08	2.21	2.33	2.46
	60	2.54	4.06	5.58	7.11	8.63	10.15	11.68	13.20	14.72	16.25	17.77	19.29	20.81	22.34	23.86	25.38	26.91	28.43	29.95
	1.50	0.24	0.38	0.52	0.66	0.80	0.94	1.09	1.23	1.37	1.51	1.65	1.79	1.94	2.08	2.22	2.36	2.50	2.64	2.79
	66	2.84	4.54	6.25	7.95	9.65	11.36	13.06	14.76	16.47	18.17	19.88	21.58	23.28	24.99	26.69	28.39	30.10	31.80	33.50
	1.65	0.26	0.42	0.58	0.74	0.90	1.06	1.21	1.37	1.53	1.69	1.85	2.01	2.17	2.32	2.48	2.64	2.80	2.96	3.12
	72	3.14	5.02	6.91	8.79	10.68	12.59	14.45	16.33	18.21	20.10	21.98	23.87	25.75	27.64	29.52	31.40	33.29	35.17	37.06
	1.80	0.29	0.47	0.64	0.82	0.99	1.17	1.34	1.52	1.69	1.87	2.04	2.22	2.39	2.57	2.75	2.92	3.10	3.27	3.45
	78	3.44	5.51	7.57	9.64	11.70	13.77	15.83	17.90	19.96	22.03	24.09	26.16	28.22	30.28	32.35	34.41	36.48	38.54	40.61
	1.95	0.32	0.51	0.70	0.90	1.09	1.28	1.47	1.66	1.86	2.05	2.24	2.43	2.62	2.82	3.01	3.20	3.39	3.58	3.78
	84	3.74	5.99	8.23	10.48	12.72	14.97	17.22	19.46	21.71	23.95	26.20	28.44	30.69	32.93	35.18	37.43	39.67	41.92	44.16
	2.10	0.35	0.56	0.77	0.97	1.18	1.39	1.60	1.81	2.02	2.23	2.44	2.65	2.85	3.06	3.27	3.48	3.69	3.90	4.11
	90	4.04	6.47	8.90	11.32	13.75	16.17	18.60	21.03	23.45	25.88	28.30	30.73	33.16	35.58	38.01	40.44	42.86	45.29	47.71
	2.25	0.38	0.60	0.83	1.05	1.28	1.50	1.73	1.96	2.18	2.41	2.63	2.86	3.08	3.31	3.53	3.76	3.99	4.21	4.44
	96	4.34	6.95	9.56	12.16	14.77	17.38	19.99	22.59	25.20	27.81	30.41	33.02	35.63	38.23	40.84	43.45	46.05	48.66	51.27
	2.40	0.40	0.65	0.89	1.13	1.37	1.62	1.86	2.10	2.34	2.59	2.83	3.07	3.31	3.56	3.80	4.04	4.28	4.53	4.77
	102	4.65	7.43	10.22	13.01	15.80	18.58	21.37	24.16	26.94	29.73	32.52	35.31	38.09	40.88	43.67	46.46	49.24	52.03	54.82
	2.55	0.43	0.69	0.95	1.21	1.47	1.73	1.99	2.25	2.51	2.77	3.02	3.28	3.54	3.80	4.06	4.32	4.58	4.84	5.10
	108	4.95	7.91	10.88	13.85	16.82	19.79	22.75	25.72	28.69	31.66	34.63	37.59	40.56	43.53	46.50	49.47	52.43	55.40	58.37
	2.70	0.46	0.74	1.01	1.29	1.56	1.84	2.12	2.39	2.67	2.94	3.22	3.50	3.77	4.05	4.32	4.60	4.88	5.15	5.43
	114	5.25	8.40	11.54	14.69	17.84	22.99	24.14	27.29	30.44	33.59	36.73	39.88	43.03	46.18	49.33	52.48	55.63	58.77	61.92
	2.85	0.49	0.78	1.07	1.37	1.66	1.95	2.24	2.54	2.83	3.12	3.42	3.71	4.00	4.29	4.59	4.88	5.17	5.47	5.76
	120	5.55	8.88	12.21	15.54	18.87	22.02	25.52	28.85	32.18	35.51	38.84	42.17	45.50	48.83	52.16	55.49	58.82	62.15	65.48
	3.00	0.52	0.83	1.14	1.44	1.75	2.06	2.37	2.68	2.99	3.30	3.61	3.92	4.23	4.54	4.85	5.16	5.47	5.78	6.09

PRESSURE DROP

Test size 48" x 48" (1219 x 1219)

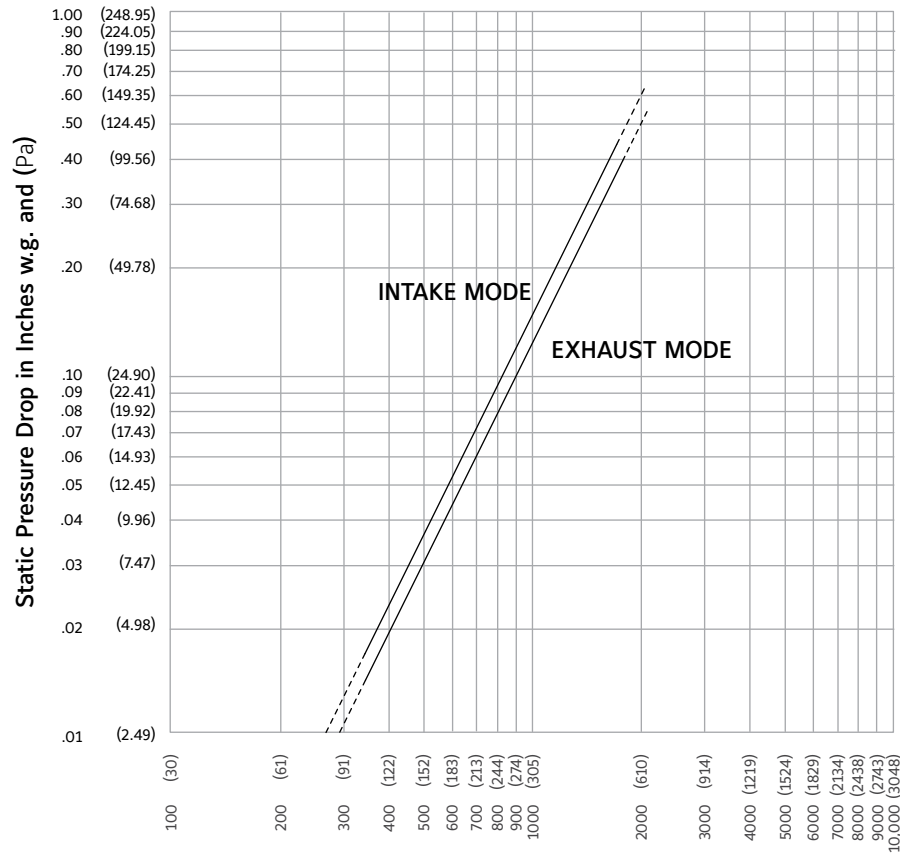


Ratings do not include the effect of a bird screen.

Air Velocity in feet and (meters) per minute through Free Area
(Data corrected to standard air density and AMCA figure or figures tested to 5.5)

AIR LEAKAGE WITH BLADES CLOSED

Leakage at 1" w.g. (248.9) static pressure drop is 10.8 CFM per ft.² and (m²).
Louver tested for air leakage with jamb seals and optional blade seals.

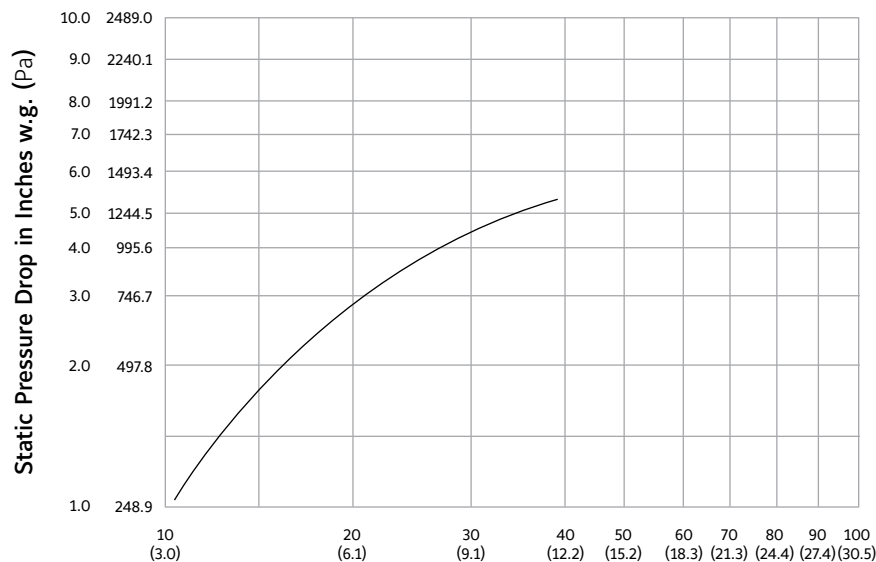


CFM (m³/min) Leakage per ft.² (m²) of Face Area
Data corrected to standard air density

PERFORMANCE DATA

AMCA Standard 500 provides a reasonable basis for testing and rating louvers. Testing to AMCA 500-L performed under a certain set of laboratory conditions. This does not guarantee that other conditions will not occur in the actual environment where louvers must operate.

The louver system should be designed with a reasonable safety factor for louver performance. To ensure protection from water carryover, design with a performance level somewhat below maximum desired pressure drop and .01 oz./sq. ft. of water penetration.

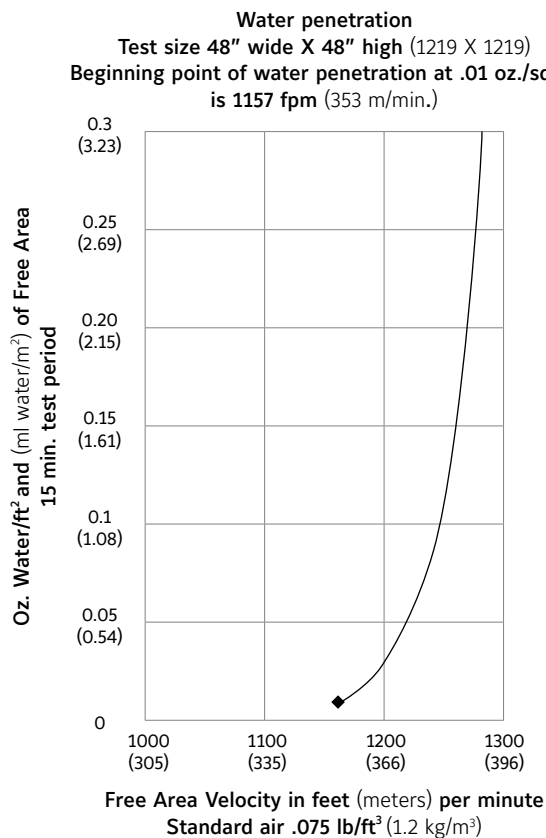

Ruskin® Company certifies that the ELM6375DX louvers shown herein are licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Ratings Seal applies to air performance ratings and water penetration ratings only.

i LINKS TO IMPORTANT DOCUMENTS

Document Title

Paint Finishes and Color Guide

Limited Warranty Document



3900 Doctor Greaves Road
 Grandview, MO 64030
 Website: www.ruskin.com
 Phone: (816) 761-7476