
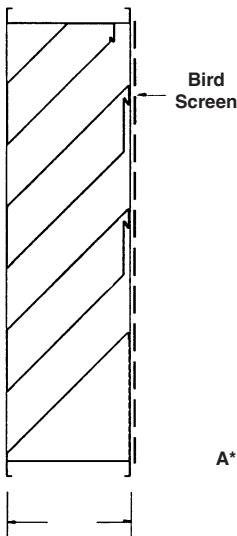


1245RAAZ STATIONARY ACOUSTICAL LOUVER FORMED STEEL

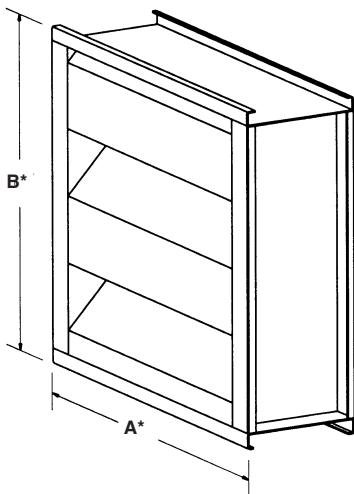

STANDARD CONSTRUCTION

FRAME

12" (305) deep, 16 gauge (1.6) galvanized steel channel.

BLADES

18 gauge (1.3) galvanized steel exterior surface, with 22 gauge (.9) perforated steel interior surface that covers insulation. Blades positioned at 45° angle and spaced approximately 12" (305) center to center.

ACOUSTICAL INSULATION

Ruskatherm blanket.

SCREEN

1/2" mesh x 19 gauge (13 x 1.1) galvanized bird screen in removable frame. Screen adds approximately 1/2" (13) to louver depth.

FINISH

Mill.

MINIMUM SIZE

12"w x 24'h (305 x 610).


APPROXIMATE SHIPPING WEIGHT

11 lbs. per sq. ft.(53.7 kg/m²).

MAXIMUM FACTORY ASSEMBLY SIZE

Shall be 75 sq. ft. (6m²). Maximum single section size shall be 48"w x 96'h (1219 x 2438). Louvers larger than the maximum single section size will require field assembly of smaller sections.

STANDARD CONSTRUCTION

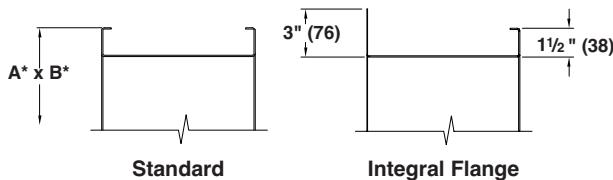

FEATURES

- Insulated blades which provide effective sound attenuation and weather protection.
- Published performance ratings based on testing in accordance with AMCA Publication 511.
- Architecturally pleasing appearance.
- 29% free area.

VARIATIONS

Variations to the basic design of this louver are available at additional cost. They include:

- Extended sill.
- Front or rear security bars.
- Filter racks.
- Installation angles.
- A variety of bird and insect screens.
- Selection of finishes: prime coat, baked enamel (modified fluoropolymer), epoxy, Acrodize, PVDF, clear and color anodize. (Anodize finish available only on aluminum construction. Some variation in anodize color consistency is possible.)
- Formed aluminum frame with .100" (2.5) nominal wall thickness and .080" (2) blade with .040" (1) perforated aluminum interior surface.

Octave Band/ Frequency (Hz)	Transmission Loss	Free Field Noise Reduction (db) Ruskatherm Blanket
2/125	7	13
3/250	6	12
4/500	14	20
5/1000	16	22
6/2000	13	19
7/4000	11	17
STC	13	
OITC	11	


STC stands for Sound Transmission Class

OITC stands for Outside Indoor Transmission class


Dimensions in inches, parenthesis () indicate millimeters.

*Units furnished 1/4" (6) smaller than given opening dimensions.

TAG	QTY.	SIZE		FRAME	VARIATIONS
		A*-WIDE	B*-HIGH		
PROJECT					LOCATION
ARCH./ENGR.					CONTRACTOR
REPRESENTATIVE					DATE

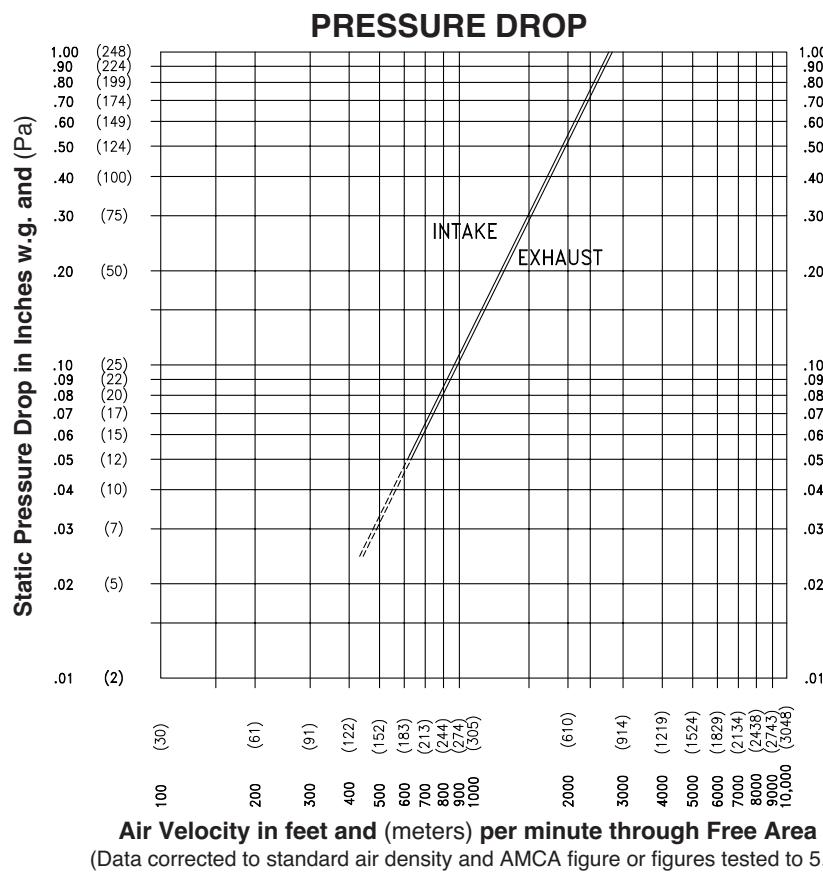

Ratings do not include
the effect of a bird
screen.

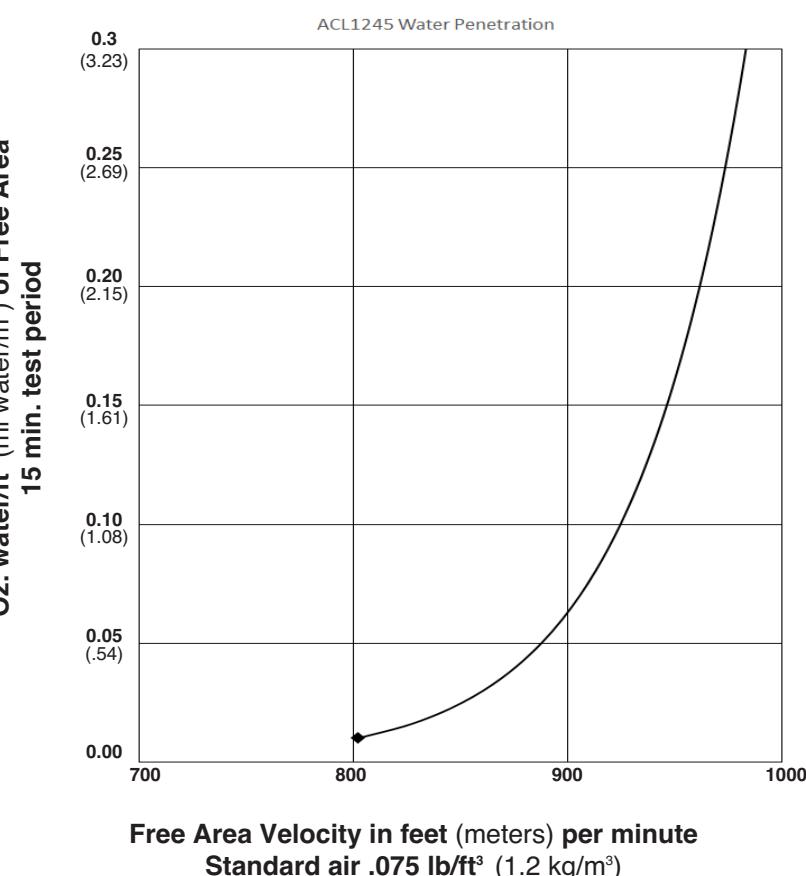

Ruskin Manufacturing Company certifies that the louver shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Standard 511 and comply with the requirements of the AMCA Certified Ratings Program. AMCA Certified Ratings Seal applies to air performance ratings, water penetration and sound attenuation ratings only.

SUGGESTED SPECIFICATION

Furnish and install louvers as hereinafter specified where shown on plans or as described in schedules. Louvers shall be stationary acoustical type contained within a 12" (305) frame. Louver components (heads, jambs, sills, blades, and mullions) shall be factory assembled by the louver manufacturer. Louver sizes too large for shipping shall be built up by the contractor from factory assembled louver sections to provide overall sizes required. Louver design shall incorporate structural supports required to withstand a wind-load of 20 lbs. per sq. ft. (.96kPa) (equivalent of a 90 mph wind [145 KPH] - specifier may substitute any loading required).

Louvers shall be Reliable Model 1245RAAZ construction as follows:

Frame: 16 gauge (1.6) galvanized steel channel.

Blades: 20 gauge (1.0) galvanized steel exterior surface, 22 gauge (.9) perforated steel interior surface that covers insulation. Blades are positioned at 45° angle and spaced approximately 12" (305) center to center.

Screen: 1/2" mesh x 19 gauge (13 x 1.1) galvanized steel in removable frame.

Finish: Select finish specification from Reliable/Valspar Finishes Brochure.

Published louver performance data bearing the AMCA Certified Ratings Seal for Air Performance and Water Penetration must be submitted for approval prior to fabrication and must demonstrate pressure drop equal to or less than the Reliable model specified.

PERFORMANCE DATA

AMCA Standard 500 provides a reasonable basis for testing and rating louvers. Testing to AMCA 500 is performed under a certain set of laboratory conditions. This does not guarantee that other conditions will not occur in the actual environment where louvers must operate.

The louver system should be designed with a reasonable safety factor for louver performance. To ensure protection from water carryover, design with a performance level somewhat below maximum desired pressure drop and .01 oz./sq. ft. of water penetration.

FREE AREA GUIDE

Free Area Guide shows free area in ft² and m² for various sizes of ACL1245
Width – Inches and Meters

	12 0.30	18 0.46	24 0.61	30 0.76	36 0.91	42 1.07	48 1.22	54 1.37	60 1.52	66 1.68	72 1.83	78 1.98	84 2.13	90 2.29	96 2.44	102 2.59	108 2.74	114 2.90	120 3.05
24 0.61	0.40 0.04	0.66 0.06	0.92 0.09	1.19 0.11	1.45 0.13	1.71 0.16	1.98 0.18	2.24 0.21	2.50 0.23	2.64 0.25	2.90 0.27	3.16 0.29	3.43 0.32	3.69 0.34	3.95 0.37	4.22 0.39	4.48 0.42	4.75 0.44	5.01 0.47
30 0.76	0.39 0.04	0.65 0.06	0.92 0.09	1.18 0.11	1.44 0.13	1.70 0.16	1.96 0.18	2.22 0.21	2.49 0.23	2.62 0.24	2.88 0.27	3.14 0.29	3.40 0.32	3.66 0.34	3.93 0.37	4.19 0.39	4.45 0.41	4.71 0.44	4.97 0.46
36 0.91	0.65 0.06	1.09 0.10	1.53 0.14	1.96 0.18	2.40 0.22	2.84 0.26	3.27 0.30	3.71 0.34	4.15 0.39	4.36 0.41	4.80 0.45	5.24 0.49	5.67 0.53	6.11 0.57	6.55 0.61	6.98 0.65	7.42 0.69	7.85 0.73	8.29 0.77
42 1.07	0.65 0.06	1.09 0.10	1.52 0.14	1.96 0.18	2.39 0.22	2.82 0.26	3.26 0.30	3.69 0.34	4.13 0.38	4.34 0.40	4.78 0.44	5.21 0.48	5.65 0.53	6.08 0.57	6.52 0.61	6.95 0.65	7.39 0.69	7.82 0.73	8.26 0.77
48 1.22	0.91 0.08	1.52 0.14	2.13 0.20	2.74 0.25	3.35 0.31	3.96 0.37	4.57 0.42	5.18 0.48	5.79 0.54	6.09 0.57	6.70 0.62	7.31 0.68	7.92 0.74	8.53 0.79	9.14 0.85	9.75 0.91	10.35 0.96	10.96 1.02	11.57 1.08
54 1.37	0.91 0.08	1.52 0.14	2.13 0.20	2.73 0.25	3.34 0.31	3.95 0.37	4.55 0.42	5.16 0.48	5.77 0.54	6.07 0.56	6.68 0.62	7.29 0.68	7.89 0.73	8.50 0.79	9.11 0.85	9.72 0.90	10.32 0.96	10.93 1.02	11.54 1.07
60 1.52	1.17 0.11	1.95 0.18	2.74 0.25	3.52 0.33	4.30 0.40	5.08 0.47	5.86 0.55	6.65 0.62	7.43 0.69	7.82 0.73	8.60 0.80	9.38 0.87	10.16 0.95	10.95 1.02	11.73 1.09	12.51 1.16	13.29 1.24	14.07 1.31	14.86 1.38
66 1.68	1.17 0.11	1.95 0.18	2.74 0.25	3.51 0.33	4.29 0.40	5.07 0.47	5.85 0.54	6.63 0.62	7.41 0.69	7.80 0.73	8.58 0.80	9.36 0.87	10.14 0.94	10.92 1.02	11.70 1.09	12.48 1.16	13.29 1.23	14.04 1.31	14.82 1.38
72 1.83	1.43 0.13	2.39 0.22	3.34 0.31	4.30 0.40	5.25 0.49	6.20 0.58	7.16 0.67	8.11 0.75	9.07 0.84	9.55 0.89	10.50 0.98	11.46 1.07	12.41 1.15	13.36 1.24	14.32 1.33	15.27 1.42	16.23 1.51	17.18 1.60	18.14 1.69
78 1.98	1.43 0.13	2.38 0.22	3.33 0.31	4.29 0.40	5.24 0.49	6.19 0.58	7.15 0.66	8.10 0.75	9.05 0.84	9.53 0.89	10.48 1.06	11.43 1.15	12.39 1.24	13.34 1.33	14.29 1.42	15.24 1.51	16.20 1.59	17.15 1.68	18.10 1.68
84 2.13	1.69 0.16	2.82 0.26	3.95 0.37	5.07 0.47	6.20 0.58	7.33 0.68	8.45 0.79	9.58 0.89	10.71 1.00	11.27 1.05	12.40 1.15	13.53 1.26	14.66 1.36	15.78 1.47	16.91 1.57	18.04 1.67	19.16 1.78	20.29 1.88	21.42 1.99
90 2.29	1.69 0.16	2.81 0.26	3.94 0.37	5.06 0.47	6.19 0.58	7.32 0.68	8.44 0.78	9.57 0.89	10.69 1.00	11.25 1.05	12.38 1.15	13.51 1.26	14.63 1.36	15.76 1.47	16.88 1.57	18.01 1.67	19.13 1.78	20.26 1.88	21.38 1.99
96 2.44	1.95 0.18	3.25 0.30	4.55 0.42	5.85 0.54	7.15 0.66	8.45 0.79	9.75 1.03	11.05 1.15	12.35 1.21	13.00 1.33	14.30 1.45	15.60 1.57	16.90 1.69	18.20 1.81	19.50 1.93	20.80 2.06	22.10 2.18	23.40 2.30	24.70 2.30

Width – Inches and Millimeters