

## LM375D ADJUSTABLE DRAINABLE LOUVER FORMED STEEL

### STANDARD CONSTRUCTION

#### FRAME

4" (102) deep, 16 (1.6) gage galvanized steel. Caulking surface provided.

#### BLADES

16 (1.6) gage galvanized steel drainable blades are positioned at  $37\frac{1}{2}^\circ$  angle and spaced approximately  $3\frac{3}{8}$ " (86) center to center.

#### SCREEN

$\frac{1}{2}$ " (13) mesh x 19 gage (1.1) galvanized bird screen in removable frame. Screen adds approximately  $\frac{1}{2}$ " (13) to louver depth.

#### SEALS

Stainless steel jamb seals

#### FINISH

Mill.

#### LINKAGE

Concealed in frame

#### BEARINGS

Stainless Steel.

#### AXLES

Plated steel hex.

#### ACTUATOR

Louver quadrant.

#### MINIMUM SIZE



12" w x 12" h (305 x 305).

#### APPROXIMATE SHIPPING WEIGHT

6 lbs. per sq. ft. (29.3 per m<sup>2</sup>).

#### MAXIMUM FACTORY ASSEMBLY SIZE

Shall not exceed 48" X 96" (1219 X 2438) with or without seals. Louvers larger than the maximum factory assembly size will require field assembly of smaller sections.

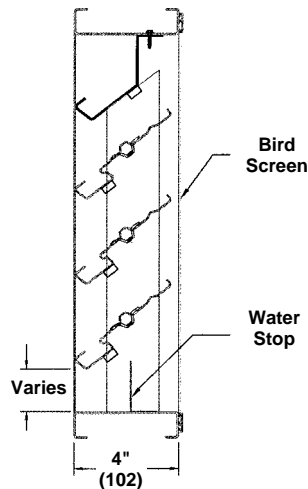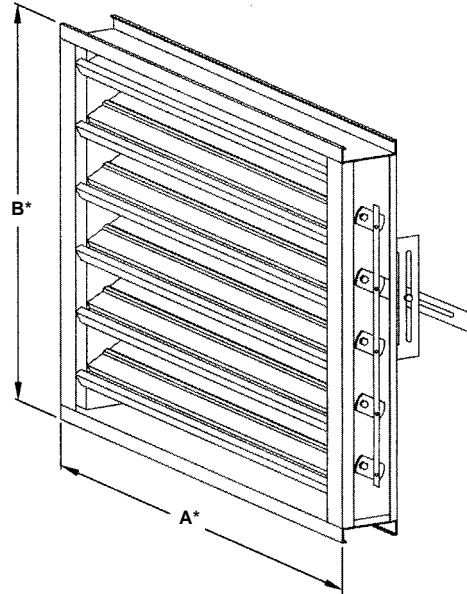

### FEATURES

- 44% Free Area
- Published performance ratings based on testing in accordance with AMCA Publication 511.
- Rugged galvanized steel construction for long operating life.
- Stainless steel bearings and concealed linkage to reduce operating torque requirements.


### VARIATIONS

Variations to the basic design of this louver are available at additional cost. They include:

- Extended sill.
- Hinged frame.
- Front or rear security bars.
- Filter racks.
- Installation angles.
- Jamb seals.
- A variety of bird and insect screens.
- Selection of finishes: Prime coat, 50% PVDF (modified fluoropolymer), Epoxy, Pearledize 50 and 70, 70% PVDF, Clear and Color Anodized finishes. (Some variation in anodize color consistency is possible).

Consult Ruskin for other special requirements.

### FRAME CONSTRUCTION

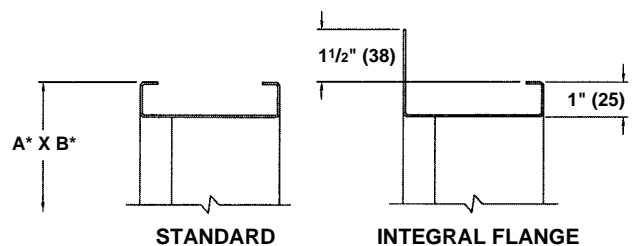

Units furnished  $\frac{1}{4}$ " (6) smaller than given opening dimensions.

Consult Ruskin for additional information.

Dimensions in parenthesis ( ) indicate millimeters.

## SUGGESTED SPECIFICATION

Furnish and install louvers as hereinafter specified where shown on plans or as described in schedule. Louvers shall be stationary type entirely contained within a 4" (102) frame. Louver components (heads, jambs, sills, blades & mullions) shall be factory assembled by the louver manufacturer. Louver sizes too large for shipping shall be built up by the contractor from factory assembled louver sections to provide overall sizes required. Louver design shall incorporate structural supports required to withstand a wind load of 20 lbs. per sq. ft. (.96kPa) equivalent of a 90 mph wind [145 KPH] - specifier may substitute any loading required).

Louvers shall be Ruskin Model LM375D construction as follows:

Frame: 16 (1.6) gage galvanized steel.

Blades: 16 (1.6) gage galvanized steel at 37<sup>1</sup>/<sub>2</sub>° angle and spaced approximately 3<sup>3</sup>/<sub>8</sub>" (86) center to center.

Screen: .50 (13) mesh x 19 gage (1.1) galvanized steel in removable frame.

Finish: Select finish specification from Ruskin Finishes Brochure.

Published louver performance data bearing the AMCA Certified Ratings Seal for Air Performance & Water Penetration must be submitted for approval prior to fabrication and must demonstrate pressure drop and water penetration equal to or less than Ruskin model specified.

## PERFORMANCE DATA


AMCA Standard 500 provides a reasonable basis for testing and rating louvers. Testing to AMCA 500 is performed under a certain set of laboratory conditions. This does not guarantee that other conditions will not occur in the actual environment where louvers

must operate. Designs should provide a reasonable safety factor for louver performance by selecting at some point below pressure drop or water penetration system requirements.

### WATER PENETRATION

Test size 48" wide x 48" high (1219 x 1219)

Beginning point of water penetration at .01 oz./sq. ft. is 1027 fpm (313 m/min).

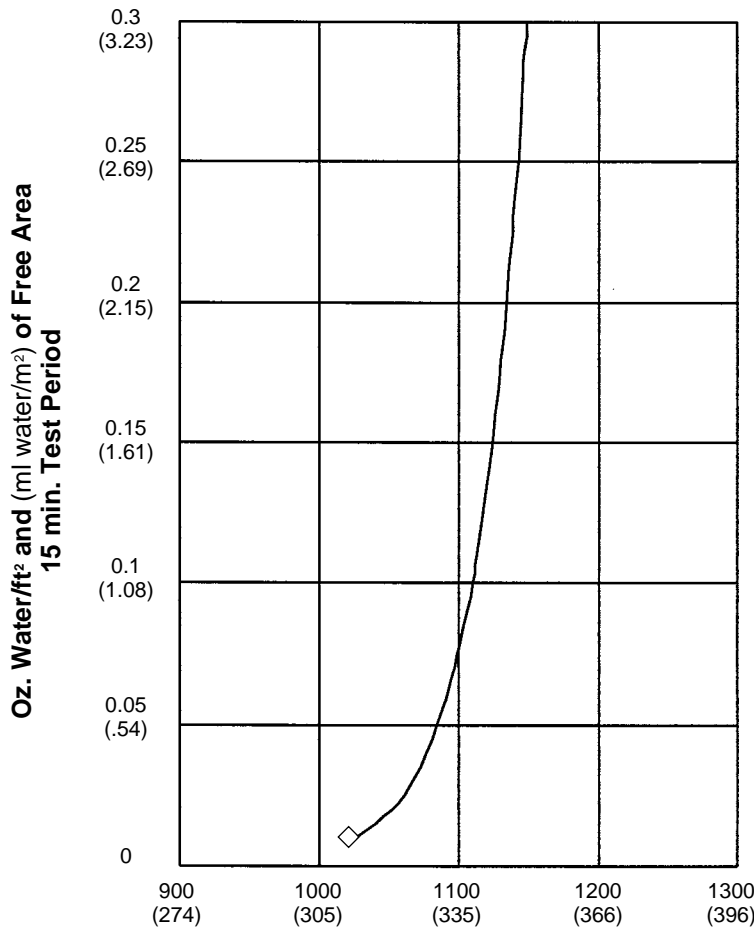

Ruskin Manufacturing certifies that the louver shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Standard 511 and comply with the requirements of the AMCA Certified Ratings Program. AMCA Certified Ratings Seal applies to air performance and water penetration ratings only.

Free Area Velocity in feet (meters) per minute  
Standard air .075 lb/ft<sup>3</sup> (1.2 kg/m<sup>3</sup>)

# FREE AREA GUIDE

Free Area Guide shows free area in ft<sup>2</sup> and m<sup>2</sup> for various sizes of LM375D.


Width – Inches and Meters

Height – Inches and Meters

	12	18	24	30	36	42	48	54	60	66	72	78	84	90	96	102	108	114	120
12	0.30	0.45	0.60	0.75	0.90	1.05	1.20	1.35	1.50	1.65	1.80	1.95	2.10	2.25	2.40	2.55	2.70	2.85	3.00
0.30	0.02	0.04	0.05	0.06	0.08	0.09	0.10	0.12	0.13	0.14	0.16	0.17	0.18	0.20	0.21	0.22	0.24	0.25	0.26
18	0.47	0.74	1.02	1.30	1.57	1.85	2.13	2.40	2.68	2.96	3.23	3.51	3.79	4.06	4.34	4.62	4.89	5.17	5.45
0.45	0.04	0.07	0.09	0.12	0.15	0.17	0.20	0.22	0.25	0.27	0.30	0.33	0.35	0.38	0.40	0.43	0.46	0.48	0.51
24	0.69	1.10	1.51	1.92	2.33	2.74	3.14	3.55	3.96	4.37	4.78	5.19	5.60	6.01	6.42	6.82	7.23	7.64	8.05
0.60	0.06	0.10	0.14	0.18	0.22	0.25	0.29	0.33	0.37	0.41	0.44	0.48	0.52	0.56	0.60	0.63	0.67	0.71	0.75
30	0.91	1.45	2.00	2.54	3.08	3.62	4.16	4.70	5.24	5.79	6.33	6.87	7.41	7.95	8.49	9.03	9.57	10.12	10.66
0.75	0.08	0.14	0.19	0.24	0.29	0.34	0.39	0.44	0.49	0.54	0.59	0.64	0.69	0.74	0.79	0.84	0.89	0.94	0.99
36	1.10	1.76	2.41	3.06	3.72	4.37	5.02	5.68	6.33	6.98	7.64	8.29	8.94	9.60	10.25	10.91	11.56	12.21	12.87
0.90	0.10	0.16	0.22	0.28	0.35	0.41	0.47	0.53	0.59	0.65	0.71	0.77	0.83	0.89	0.95	1.01	1.07	1.14	1.20
42	1.33	2.11	2.90	3.68	4.47	5.26	6.04	6.83	7.61	8.40	9.18	9.97	10.76	11.54	12.33	13.11	13.90	14.68	15.47
1.05	0.12	0.20	0.27	0.34	0.42	0.49	0.56	0.63	0.71	0.78	0.85	0.93	1.00	1.07	1.15	1.22	1.29	1.37	1.44
48	1.55	2.47	3.39	4.30	5.22	6.14	7.06	7.98	8.89	9.81	10.73	11.65	12.57	13.49	14.40	15.32	16.24	17.16	18.08
1.20	0.14	0.23	0.31	0.40	0.49	0.57	0.66	0.74	0.83	0.91	1.00	1.08	1.17	1.25	1.34	1.42	1.51	1.60	1.68
54	1.77	2.82	3.87	4.92	5.97	7.03	8.08	9.13	10.18	11.23	12.28	13.33	14.38	15.43	16.48	17.53	18.58	19.63	20.68
1.35	0.16	0.26	0.36	0.46	0.56	0.65	0.75	0.85	0.95	1.04	1.14	1.24	1.34	1.43	1.53	1.63	1.73	1.83	1.92
60	2.00	3.18	4.36	5.54	6.73	7.91	9.09	10.28	11.46	12.64	13.82	15.01	16.19	17.37	18.56	19.74	20.92	22.10	23.29
1.50	0.19	0.30	0.41	0.52	0.63	0.74	0.85	0.96	1.07	1.18	1.29	1.40	1.51	1.62	1.73	1.84	1.95	2.06	2.17
66	2.22	3.53	4.85	6.16	7.48	8.80	10.11	11.43	12.74	14.06	15.37	16.69	18.00	19.32	20.63	21.95	23.26	24.58	25.89
1.65	0.21	0.33	0.45	0.57	0.70	0.82	0.94	1.06	1.18	1.31	1.43	1.55	1.67	1.80	1.92	2.04	2.16	2.29	2.41
72	2.41	3.84	5.26	6.69	8.12	9.55	10.97	12.40	13.83	15.25	16.68	18.11	19.54	20.96	22.39	23.82	25.25	26.67	28.10
1.80	0.22	0.36	0.49	0.62	0.75	0.89	1.02	1.15	1.29	1.42	1.55	1.68	1.82	1.95	2.08	2.22	2.35	2.48	2.61
78	2.63	4.19	5.75	7.31	8.87	10.43	11.99	13.55	15.11	16.67	18.23	19.79	21.35	22.91	24.47	26.03	27.59	29.15	30.71
1.95	0.24	0.39	0.53	0.68	0.82	0.97	1.12	1.26	1.41	1.55	1.70	1.84	1.99	2.13	2.28	2.42	2.57	2.71	2.86
84	2.86	4.55	6.24	7.93	9.62	11.32	13.01	14.70	16.39	18.08	19.78	21.47	23.16	24.85	26.54	28.24	29.93	31.62	33.31
2.10	0.27	0.42	0.58	0.74	0.89	1.05	1.21	1.37	1.52	1.68	1.84	2.00	2.15	2.31	2.47	2.63	2.78	2.94	3.10
90	3.08	4.90	6.73	8.55	10.38	12.20	14.02	15.85	17.67	19.50	21.32	23.15	24.97	26.79	28.62	30.44	32.27	34.09	35.92
2.25	0.29	0.46	0.63	0.80	0.96	1.13	1.30	1.47	1.64	1.81	1.98	2.15	2.32	2.49	2.66	2.83	3.00	3.17	3.34
96	3.30	5.26	7.22	9.17	11.13	13.09	15.04	17.00	18.96	20.91	22.87	24.83	26.78	28.74	30.69	32.65	34.61	36.56	38.52
2.40	0.31	0.49	0.67	0.85	1.03	1.22	1.40	1.58	1.76	1.94	2.13	2.31	2.49	2.67	2.85	3.04	3.22	3.40	3.58
102	3.53	5.61	7.70	9.79	11.88	13.97	16.06	18.15	20.24	22.33	24.42	26.50	28.59	30.68	32.77	34.86	36.95	39.04	41.13
2.55	0.33	0.52	0.72	0.91	1.10	1.30	1.49	1.69	1.88	2.08	2.27	2.46	2.66	2.85	3.05	3.24	3.44	3.63	3.82
108	3.75	5.97	8.19	10.41	12.63	14.86	17.08	19.30	21.52	23.74	25.96	28.18	30.40	32.63	34.85	37.07	39.29	41.51	43.73
2.70	0.35	0.56	0.76	0.97	1.17	1.38	1.59	1.79	2.00	2.21	2.41	2.62	2.83	3.03	3.24	3.45	3.65	3.86	4.07
114	3.94	6.27	8.60	10.94	13.27	15.61	17.94	20.27	22.61	24.94	27.27	29.61	31.94	34.27	36.61	38.94	41.27	43.61	45.94
2.85	0.37	0.58	0.80	1.02	1.23	1.45	1.67	1.89	2.10	2.32	2.54	2.75	2.97	3.19	3.40	3.62	3.84	4.06	4.27
120	4.16	6.63	9.09	11.56	14.02	16.49	18.96	21.42	23.89	26.35	28.82	31.29	33.75	36.22	38.68	41.15	43.61	46.08	48.55
3.00	0.39	0.62	0.85	1.07	1.30	1.53	1.76	1.99	2.22	2.45	2.68	2.91	3.14	3.37	3.60	3.83	4.06	4.29	4.51

## PRESSURE DROP

Test size 48" x 48" (1219 x 1219)

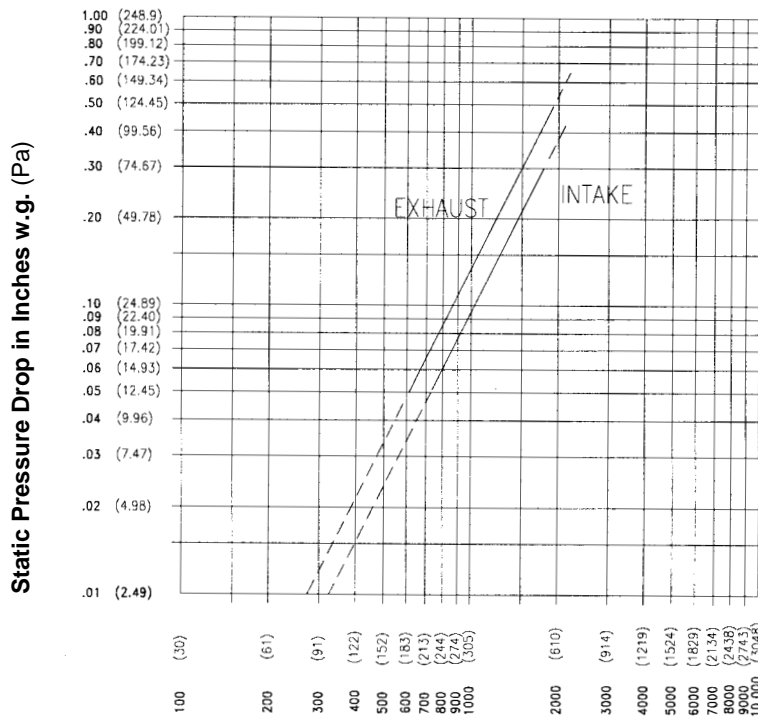

Ratings do not include the effect of a bird screen.

Air Velocity in feet (meters) per minute through Free Area



3900 Dr. Greaves Rd.  
 Kansas City, MO 64030  
 (816) 761-7476  
 FAX (816) 765-8955  
 www.ruskin.com