

EME545D WIND-DRIVEN RAIN RESISTANT STATIONARY LOUVER

AMCA550 CERTIFIED

MIAMI-DADE COUNTY, FLORIDA 18-1025.02

STANDARD CONSTRUCTION

FRAME

Double frame design produced from 6063T6 extruded aluminum with .081" (2.1) nominal wall thickness. Exterior frame depth is 2" (51) and interior frame depth is 3" (76). Overall combined frame depth is 5" (178) nominal.

BLADES

Sight-proof design produced from 6063T6 extruded aluminum with .081" (2.1) nominal wall thickness. Exterior blades are 2" (51) deep, positioned at 45° angle interior blades are 3" (76) deep.

SCREEN

5/8" x .040" (16 x 1) expanded, flattened aluminum bird screen in removable frame. Screen adds approximately 1/2" (13) to louver depth.

EXTENDED SILL

.081" (2.1) formed aluminum with end dams. Not provided with front flange frame.

FINISH

Mill.

MINIMUM SIZE

12"w x 12"h (305 x 305).

APPROXIMATE SHIPPING WEIGHT

7 lbs. per sq. ft. (39 kg/m²)



MAXIMUM FACTORY ASSEMBLY SIZE

Standard EME545D - shall not exceed 120"w x 90"h (3048 x 2286) or 90"w x 96"h (2286 x 2439). Louvers larger than the maximum factory assembly size will require field assembly of smaller sections.


FIELD ASSEMBLY: unlimited width x 96"h (2439). Multiple section louver will be shipped in single sections and must be joined together in the field by the installer. Section joint splice hardware is provided. Sections may not be stacked in height. Openings taller than the maximum louver height will need to be divided into multiple openings with suitable structural members. Structural members are not designed or provided by Ruskin.

INSTALLATION: The EME545D must be installed per the appropriate Installation Detail. Reference the appropriate separate Installation Instruction Sheet Sections may not be stacked in height.

Consult Ruskin for additional information.

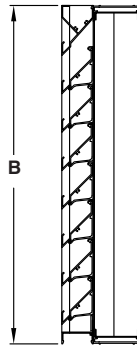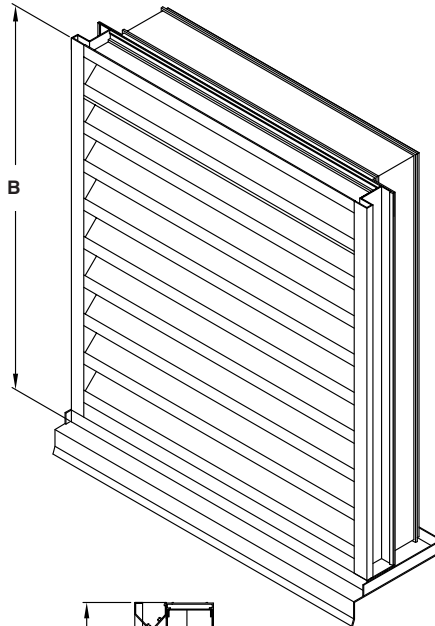

FRAME CONSTRUCTION



STANDARD

FEATURES

- Two-piece blade design provides protection from wind driven rain penetration, reducing damage and additional operating expenses.
- Complies with the 2017 Florida Building Code (FBC) and is approved for use in the High Velocity Hurricane Zone. Also Miami-Dade approved for use in open structures with provisions to manage weather infiltration (wet rooms).
- Tested to the following FBC/Miami-Dade County test protocols:
 - TAS-201 Large Missile Impact Test
 - TAS-202 Uniform Static Pressure
 - TAS-203 Cyclic Pressure Test
- Maximum windload ±130 PSF (6.2 kPa).
- Tested to AMCA 500-L Louver Standard
- Tested to AMCA 550 High Velocity Wind Driven Rain Standard
- Published performance ratings based on testing in accordance with AMCA Publication 511 & 512
- 37% Free Area.
- Aluminum construction for low maintenance and high resistance to corrosion.K

VARIATIONS

- Insulated or sheet blank-off panels.
- Front or rear security bars.
- Filter racks.
- Installation angles.
- A variety of bird and insect screens.
- Selection of finishes prime coat, 50% PVDF (modified fluoropolymer), epoxy, Pearlize 50 & 70, 70% PVDF clear and color anodize. (Some variation in anodize color consistency is possible.)

Consult Ruskin for other special requirements.



HIGH VELOCITY
RAIN RESISTANT
WITH BLADES FULLY OPEN

See www.AMCA.org for all certified or listed products

This label does not signify AMCA airflow performance certification.

Ruskin certifies that the EME545D shown herein is approved to bear the AMCA Listing Label. The ratings shown are based on tests and procedures performed in accordance with AMCA Publications and comply with the requirements of the AMCA Listing Label Program.

The AMCA Listing Label applies to High Velocity Rain Resistant Louver Louvers.


FREE AREA GUIDE

Free Area Guide shows free area in ft² and m² for various sizes of EME545D.
Width – Inches and Meters

	12	18	24	30	36	42	48	54	60	66	72	78	84	90	96	102	108	114	120
	1.12	1.67	2.23	2.79	3.35	3.91	4.46	5.02	5.58	6.14	6.70	7.25	7.81	8.37	8.93	9.49	10.04	10.60	11.16
12	0.35	0.57	0.79	1.00	1.22	1.44	1.65	1.87	2.09	2.30	2.52	2.74	2.95	3.17	3.39	3.60	3.82	4.04	4.25
1.12	0.03	0.05	0.07	0.09	0.11	0.13	0.15	0.17	0.19	0.21	0.23	0.25	0.27	0.29	0.31	0.34	0.36	0.38	0.40
18	0.51	0.83	1.14	1.46	1.77	2.08	2.40	2.71	3.03	3.34	3.66	3.97	4.29	4.60	4.92	5.23	5.55	5.86	6.18
1.67	0.05	0.08	0.11	0.14	0.16	0.19	0.22	0.25	0.28	0.31	0.34	0.37	0.40	0.43	0.46	0.49	0.52	0.55	0.57
24	0.66	1.06	1.46	1.87	2.27	2.68	3.08	3.48	3.89	4.29	4.70	5.10	5.50	5.91	6.31	6.72	7.12	7.52	7.93
2.23	0.06	0.10	0.14	0.17	0.21	0.25	0.29	0.32	0.36	0.40	0.44	0.47	0.51	0.55	0.59	0.62	0.66	0.70	0.74
30	0.80	1.30	1.79	2.28	2.78	3.27	3.76	4.26	4.75	5.24	5.74	6.23	6.72	7.22	7.71	8.20	8.70	9.19	9.68
2.79	0.07	0.12	0.17	0.21	0.26	0.30	0.35	0.40	0.44	0.49	0.53	0.58	0.63	0.67	0.72	0.76	0.81	0.85	0.90
36	0.95	1.53	2.11	2.69	3.28	3.86	4.44	5.03	5.61	6.19	6.77	7.36	7.94	8.52	9.10	9.69	10.27	10.85	11.44
3.35	0.09	0.14	0.20	0.25	0.30	0.36	0.41	0.47	0.52	0.58	0.63	0.68	0.74	0.79	0.85	0.90	0.96	1.01	1.06
42	1.09	1.76	2.44	3.11	3.78	4.45	5.12	5.80	6.47	7.14	7.81	8.48	9.16	9.83	10.50	11.17	11.84	12.52	13.19
3.91	0.10	0.16	0.23	0.29	0.35	0.41	0.48	0.54	0.60	0.66	0.73	0.79	0.85	0.91	0.98	1.04	1.10	1.16	1.23
48	1.24	2.00	2.76	3.52	4.28	5.04	5.81	6.57	7.33	8.09	8.85	9.61	10.37	11.14	11.90	12.66	13.42	14.18	14.94
4.46	0.12	0.19	0.26	0.33	0.40	0.47	0.54	0.61	0.68	0.75	0.82	0.89	0.96	1.04	1.11	1.18	1.25	1.32	1.39
54	1.38	2.23	3.08	3.93	4.79	5.64	6.49	7.34	8.19	9.04	9.89	10.74	11.59	12.44	13.29	14.14	14.99	15.84	16.70
5.02	0.13	0.21	0.29	0.37	0.45	0.52	0.60	0.68	0.76	0.84	0.92	1.00	1.08	1.16	1.24	1.32	1.39	1.47	1.55
60	1.53	2.47	3.41	4.35	5.29	6.23	7.17	8.11	9.05	9.99	10.93	11.87	12.81	13.75	14.69	15.63	16.57	17.51	18.45
5.58	0.14	0.23	0.32	0.40	0.49	0.58	0.67	0.75	0.84	0.93	1.02	1.10	1.19	1.28	1.37	1.45	1.54	1.63	1.72
66	1.67	2.70	3.73	4.76	5.79	6.82	7.85	8.88	9.91	10.94	11.97	13.00	14.03	15.05	16.08	17.11	18.14	19.17	20.20
6.14	0.16	0.25	0.35	0.44	0.54	0.63	0.73	0.83	0.92	1.02	1.11	1.21	1.30	1.40	1.50	1.59	1.69	1.78	1.88
72	1.82	2.94	4.06	5.17	6.29	7.41	8.53	9.65	10.77	11.89	13.01	14.12	15.24	16.36	17.48	18.60	19.72	20.84	21.96
6.70	0.17	0.27	0.38	0.48	0.59	0.69	0.79	0.90	1.00	1.11	1.21	1.31	1.42	1.52	1.63	1.73	1.83	1.94	2.04
78	1.96	3.17	4.38	5.59	6.80	8.00	9.21	10.42	11.63	12.84	14.04	15.25	16.46	17.67	18.88	20.08	21.29	22.50	23.71
7.25	0.18	0.29	0.41	0.52	0.63	0.74	0.86	0.97	1.08	1.19	1.31	1.42	1.53	1.64	1.76	1.87	1.98	2.09	2.20
84	2.11	3.41	4.70	6.00	7.30	8.60	9.89	11.19	12.49	13.78	15.08	16.38	17.68	18.97	20.27	21.57	22.87	24.16	25.46
7.81	0.20	0.32	0.44	0.56	0.68	0.80	0.92	1.04	1.16	1.28	1.40	1.52	1.64	1.76	1.89	2.01	2.13	2.25	2.37
90	2.25	3.64	5.03	6.41	7.80	9.19	10.57	11.96	13.35	14.73	16.12	17.51	18.89	20.28	21.67	23.05	24.44	25.83	27.21
8.37	0.21	0.34	0.47	0.60	0.73	0.85	0.98	1.11	1.24	1.37	1.50	1.63	1.76	1.89	2.02	2.14	2.27	2.40	2.53
96	2.40	3.87	5.35	6.83	8.30	9.78	11.26	12.73	14.21	15.68	17.16	18.64	20.11	21.59	23.06	24.54	26.02	27.49	28.97
8.93	0.22	0.36	0.50	0.63	0.77	0.91	1.05	1.18	1.32	1.46	1.60	1.73	1.87	2.01	2.14	2.28	2.42	2.56	2.69

PRESSURE DROP

Pressure Drop testing performed on 48" x 48" (1219 x 1219) unit.

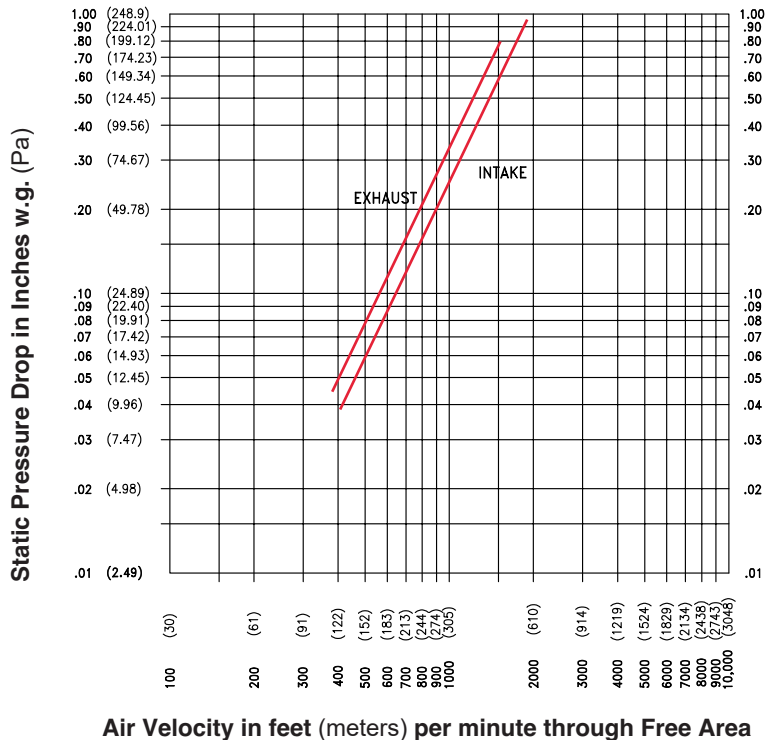

Ratings do not include the effect of a bird screen.

SUGGESTED SPECIFICATION


Furnish and install louvers as hereinafter specified where shown on plans or as described in schedules. Louvers shall possess stationary vertical blades designed to prevent the penetration of wind-driven rain. Louver blades shall be contained within a 5" (125) frame. Extended sill shall be provided to capture and drain water to exterior of building. Louver components (heads, jams, sill and blades) shall be factory assembled by the louver manufacturer. Louver sizes too large for shipping shall be built up by the contractor from factory assembled louver sections to provide overall sizes required. Louver design shall limit single span between visible mullions to 5' (1.5) and shall withstand a wind load of 130 lbs. per sq. ft. (6.2kPa) (equivalent of a 90 mph wind [145 kph] - specifier may substitute any loading required).

Louvers shall be Ruskin Model EME545D extruded 6063T6 aluminum alloy construction as follows:

Frame: .081" (2.1) wall thickness, caulking surfaces provided.
 Blades: .081" (2.1) wall thickness, exterior 2" (51) deep blades positioned at 45°. Interior blades are 3" (76).
 Extended Sill: .081" (2.1) wall thickness with upturned side panels to prevent water leakage.
 Screen: 5/8" x .040" (16 x 1) expanded, flattened aluminum bird screen in removable frame.
 Finish: Select finish specification from Ruskin Finishes Brochure.

WATER PENETRATION GRAPH

Test size 48" x 48" (1219 x 1219)
 Beginning point of water penetration at .01 oz./sq. ft. is above 1250 fpm (381 m/min.)

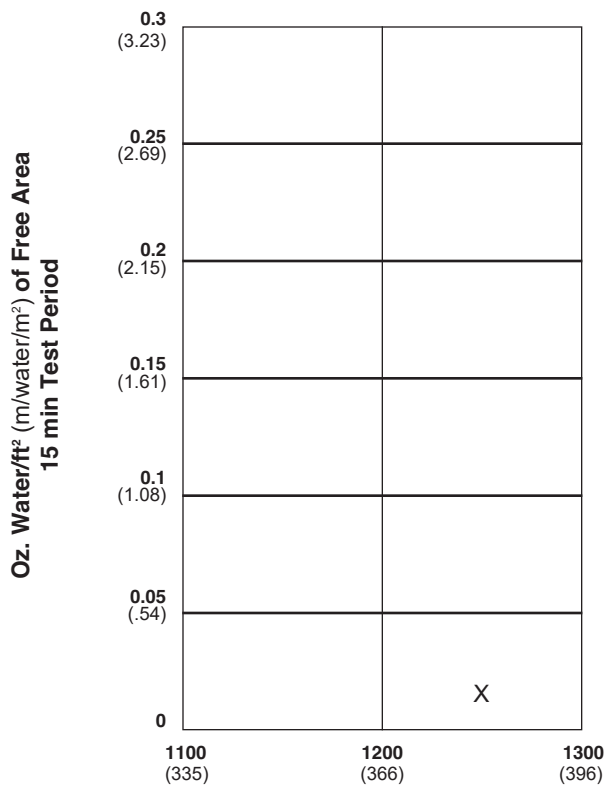

Ruskin Company certifies that the louver shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Ratings Seal applies to air performance ratings, water penetration ratings and wind driven rain ratings only.

WIND-DRIVEN RAIN PERFORMANCE – AMCA 500-L WIND-DRIVEN RAIN TEST

Test size is 1.2m x 1.1m (46 1/2" x 43 7/8") core area, 1.22m x 1.22m (48" x 48") nominal. Free Area of test louver is 5.96 ft² (.55m²).

Wind Velocity mph (kph)	Rain Fall Rate In./hr. (mm/hr.)	Core Velocity ₁ fpm (m/s)	Airflow cfm (m³/min)	Free Area Velocity ₂ fpm (m/sec.)	Effectiveness Ratio	Class ₃
29 (46.4)	3 (76)	976 (3.5)	10,511 (298)	1,764 (8.7)	99.8%	A
50 (80.5)	8 (203)	960 (3.5)	10,331 (293)	1,734 (8.7)	99.9%	A

NOTES

- Core area is the open area of the louver face (face area less louver frames). Core Velocity is the airflow velocity through the Core Area of the louver (1m x 1m).
- Free Area of test size is calculated per AMCA standard 500-L.

- Wind Driven Rain Penetration Classes:

Class	Effectiveness	Class	Effectiveness
A	1 to .99	B	0.989 to 0.95
C	0.949 to 0.80	D	Below 0.8

(The higher the coefficient, the less resistance to airflow.)

RUSKIN®

3900 Dr. Greaves Rd.
Kansas City, MO 64030
(816) 761-7476
FAX (816) 765-8955
www.ruskin.com

Printed on recycled paper
using vegetable based inks

