









WALL-MOUNT TYPE VENTILATING FAN ROCKERSTER PERFORMANCE AND ROCKERSTER PERFORMANCE AND ROCKERSTER PERFORMANCE PERF






KDK Wall-Mount Type Ventilating Fan

- · Half-pitch condenser motor with thermal cut-off
- Well lubricated bearing for long life operation
- Aluminum made propeller blade
- Automatic shutter



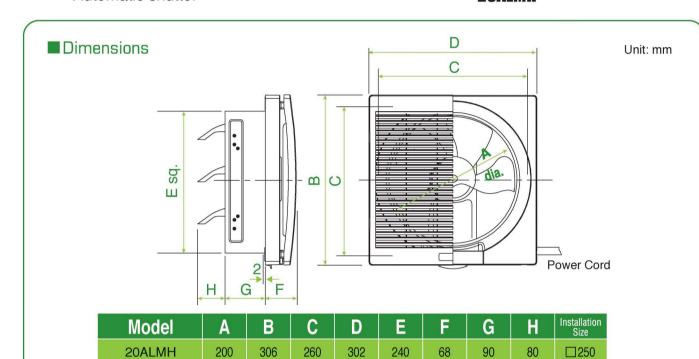

Specifications								
Model	Voltage	Frequency	CFM / SONE at static pressure (ps-inches of H ₂ O)				RPM	Watts
			inches of H₂O	0	0.10	0.15	HPIWI	walls
20ALMH	220 V	60 Hz	CFM	310	100	12	1,430	29.5
			Sones	3.3	4.6	4.6		

Performance certified is for wall-mount type ventilating fan for installation type A: Free inlet, Free outlet. Performance ratings include the effects of an inlet grill and backdraft damper. Speed (RPM) shown is nominal. Performance is based on actual speed of test. The speed (RPM) and Watts rating shown is at the static pressure of 0 inches of H₂O. The sound ratings shown are loudness values in hemispherical sones at 5ft. (1.5m) in a hemispherical free field calculated per AMCA Standard 301. Values are shown for installation type A: Free inlet hemispherical sone levels



KDK Company, Division of PES and Panasonic Ecology Systems Guangdong Co., Ltd. certify that the wall mount type ventilating fan 20ALMH shown herein are licensed to bear the AMCA seal. The ratings shown are based on the tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program



KDK Company, Division of PES

Panasonic Ecology Systems Guangdong Co., Ltd.

Actual colors may vary slighty from those shown.
 Specifications are subject to change without prior notice.

CATALOG NO: K-AMCA004A1









