

MODEL 455XP


Free Area in Square Feet And Square Meters

Free Area AMCA Licensed for openings up to 72" X 120".
For free area data for larger openings, contact factory.

FREE AREA IN SQUARE FEET AND SQUARE METERS


3048. mm	0.435	0.956	1.478	1.999	2.521	3.042
120"	4.680	10.292	15.904	21.516	27.128	32.74
2743.2 mm	0.390	0.857	1.325	1.792	2.259	2.726
108"	4.194	9.224	14.254	19.284	24.314	29.343
2438.4 mm	0.345	0.758	1.171	1.584	1.998	2.411
96"	3.709	8.156	12.604	17.052	21.499	25.947
2133.6 mm	0.300	0.659	1.018	1.377	1.736	2.095
84"	3.223	7.089	10.954	14.819	18.685	22.550
1828.8 mm	0.255	0.560	0.865	1.170	1.475	1.780
72"	2.738	6.021	9.304	12.587	15.870	19.153
1524. mm	0.209	0.460	0.711	0.962	1.213	1.464
60"	2.252	4.953	7.654	10.355	13.056	15.757
1219.2 mm	0.164	0.361	0.558	0.755	0.952	1.149
48"	1.767	3.885	6.004	8.123	10.241	12.360
914.4 mm	0.119	0.262	0.405	0.548	0.690	0.833
36"	1.281	2.818	4.354	5.890	7.427	8.963
609.6 mm	0.074	0.163	0.251	0.340	0.429	0.518
24"	0.796	1.750	2.704	3.658	4.612	5.567
304.8 mm	0.029	0.064	0.098	0.133	0.167	0.202
12"	0.310	0.682	1.054	1.426	1.798	2.17
H/W	304.8 mm	609.6 mm	914.4 mm	1219.2 mm	1524. mm	1828.8 mm
	12"	24"	36"	48"	60"	72"

Performance Chart

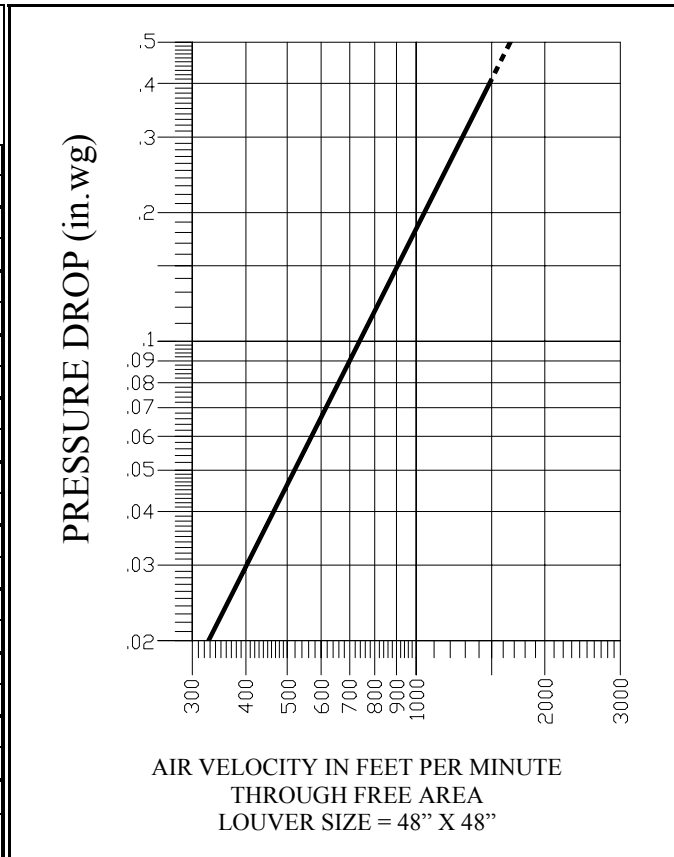

Water Penetration Chart

The AMCA Certified Ratings Seal applies to Air Capacities in the intake mode only.

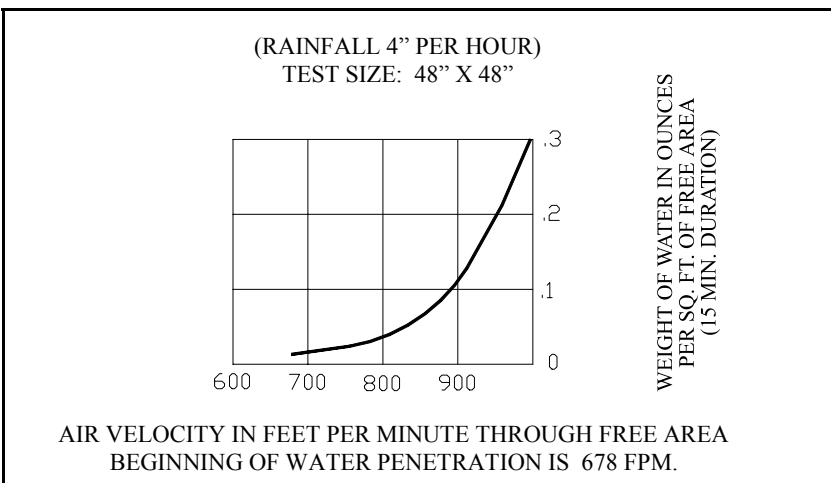

Industrial Louvers, Inc. certifies that Model 455XP shown hereon is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program.

The AMCA Certified Ratings Seal applies to air performance ratings and water penetration ratings.

Ratings do not include the effect of a bird screen.

NOTE: All tests are for standard .075 lb./cu. ft.

CATALOG NO. 455XP

Rev: JANUARY 2004

