



SCH-HC670

高效中压离心通风机


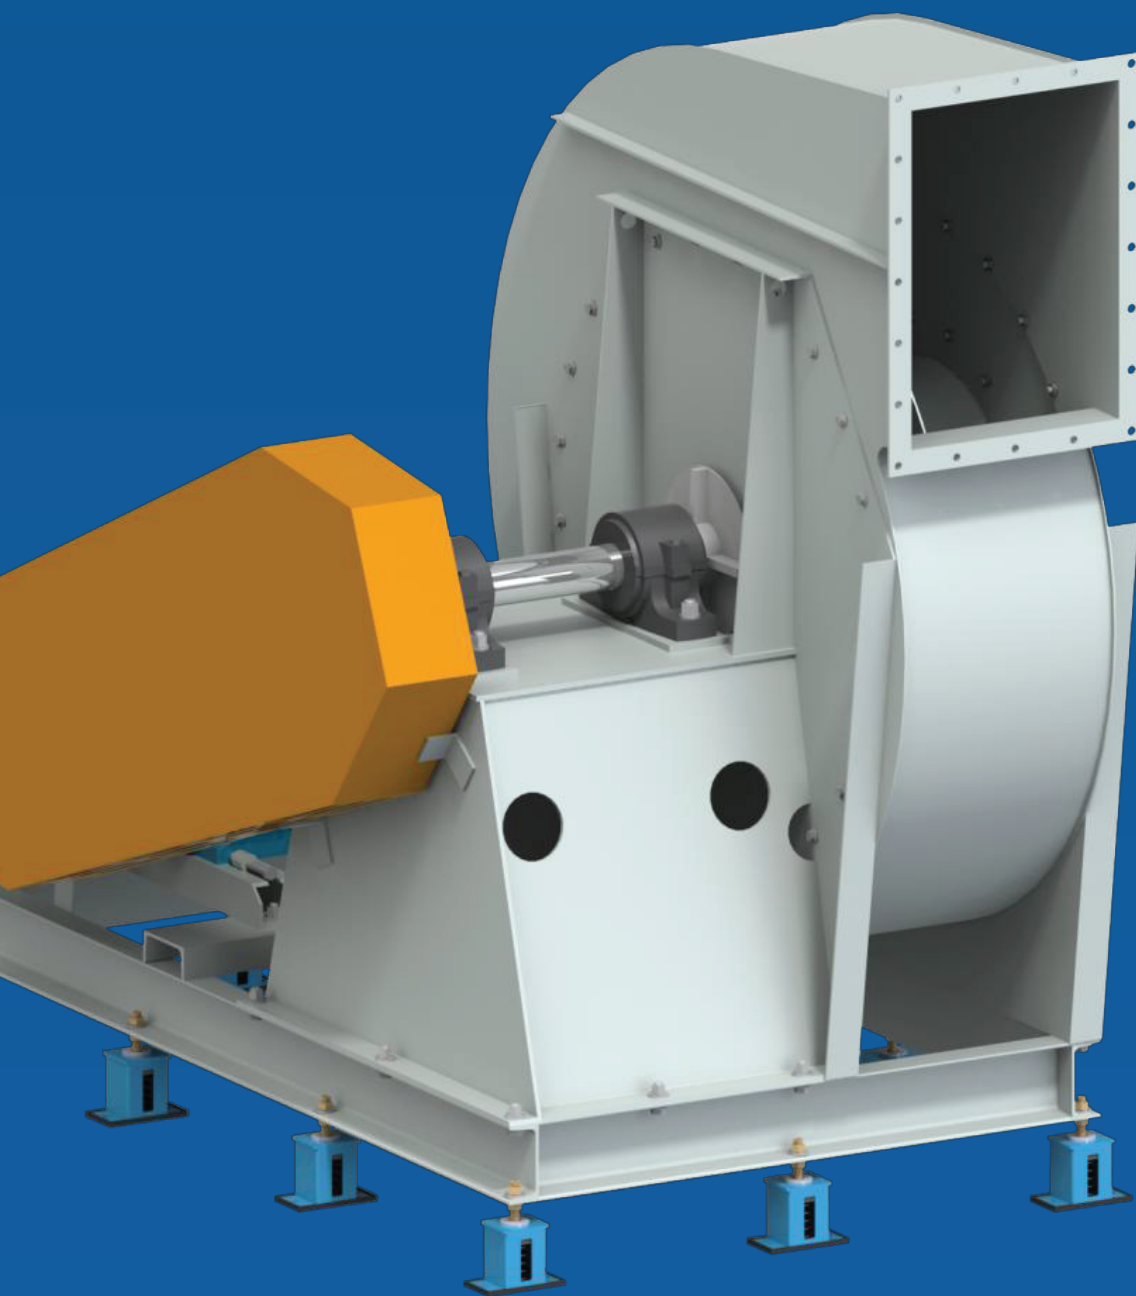


Shanghai Walker General Equipment Co. Ltd certifies that the SCH-HC670 Centrifugal Fan shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.



Walker Company

叶轮直径 Wheel Diameter – 665mm
 最大转速 Max RPM – 2900 RPM
 最大风量 Max Volume – 16500 m³/h
 最大静压 Max SP – 6700 Pa
 运输体积 Transport volume – 4.11m³

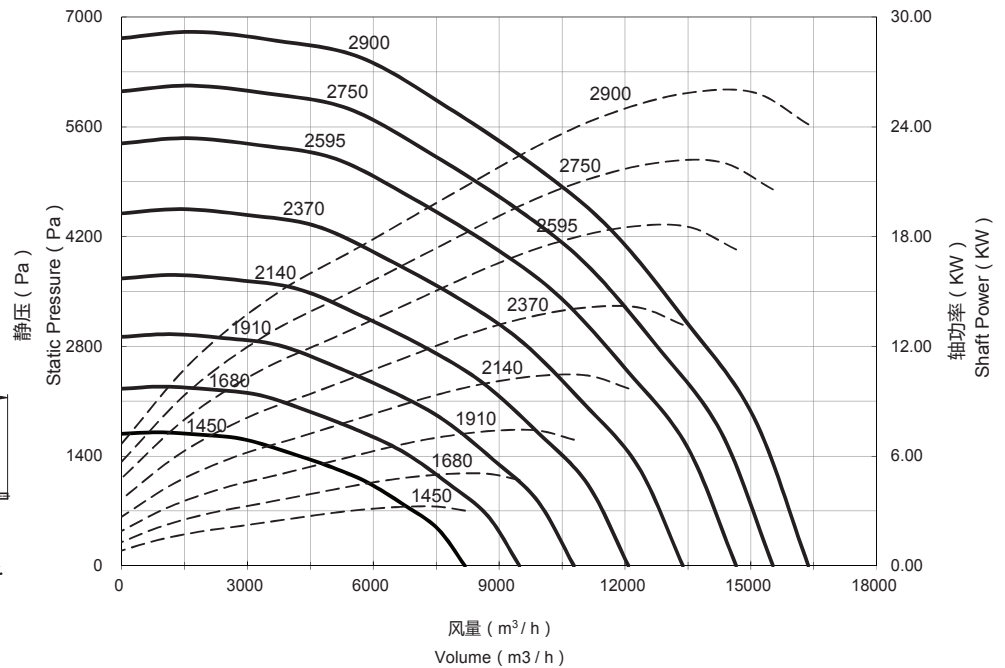

NO.	转速 RPM	静压 Pa	风量 CMH	静压 in.Wg	八段倍频 (Lw)								声功率级 LWA	声压级@1.5m LpA(dBA)
					1	2	3	4	5	6	7	8		
1	1450	1	8186	0.003	88	90	91	90	88	85	82	77	93	81
		1065	5855	4.280	86	88	88	86	81	77	76	75	87	75
		1621	2851	6.511	86	87	90	83	78	74	75	75	86	74
		1682	0	6.759	86	87	91	83	78	74	75	75	86	74
2	1680	1	9485	0.003	91	92	94	94	92	88	86	81	97	85
		1430	6784	5.745	89	91	91	90	86	80	80	79	91	79
		2176	3304	8.740	89	89	94	87	83	77	78	78	90	78
		2259	0	9.073	89	89	94	87	82	77	78	78	90	78
3	1910	1	10784	0.004	93	95	97	97	95	92	90	85	100	88
		1848	7713	7.426	91	93	94	93	89	84	82	82	95	83
		2812	3756	11.297	92	91	96	91	86	81	80	81	93	81
		2919	0	11.728	92	91	97	91	86	80	80	81	93	81
4	2140	1	12082	0.006	96	97	99	99	98	95	92	88	103	91
		2320	8642	9.322	94	95	97	96	92	87	85	84	97	85
		3530	4208	14.181	94	94	99	94	89	84	83	83	96	84
		3665	0	14.722	94	94	100	94	89	84	83	83	96	84
5	2370	2	13381	0.007	98	99	102	102	101	97	95	91	105	93
		2846	9570	11.434	96	97	99	98	95	90	87	87	100	88
		4330	4661	17.393	96	96	101	97	92	87	85	86	99	87
		4495	0	18.057	96	96	102	98	92	87	85	85	99	87
6	2595	2	14651	0.008	100	101	104	104	103	100	97	94	107	95
		3412	10479	13.708	98	99	101	100	98	93	90	89	102	90
		5191	5103	20.853	98	98	103	100	95	90	87	87	101	89
		5389	0	21.648	98	98	104	100	95	89	87	87	101	89
7	2750	2	15526	0.009	101	102	104	105	104	102	98	95	109	97
		3832	11105	15.394	99	100	102	102	99	95	91	90	104	92
		5829	5408	23.418	100	99	101	104	97	92	88	89	104	92
		6052	0	24.312	100	99	101	105	96	91	88	88	104	92
8	2900	3	16373	0.010	103	103	105	106	105	103	100	97	110	98
		4261	11711	17.119	100	101	103	103	101	96	92	91	105	93
		6482	5703	26.042	101	101	102	105	98	93	89	90	105	93
		6730	0	27.036	101	101	102	106	98	93	89	90	105	93

Performance certified is for installation type B – free inlet, ducted outlet. Power rating (kW) does not include transmission losses. Performance ratings do not include the effects of appurtenances (accessories). Values shown are for inlet Lwi and LwiA sound power levels for installation type B: free inlet, ducted outlet. The sound power level ratings shown are in decibels, referred to 10-12 watts, calculated per AMCA International Standard 301. The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Sound pressure level LpA (dBA) are not licensed by AMCA International.



Walker Company

中国 上海

更多详情请登录网站

www.walker-fan.com

